




Lite2 Heaters

Value you can rely on...

Lite2 Heaters

With over 50 years experience as the #1 selling brand of pool heaters—Jandy has a heater designed for every application. Reliability and performance year after year, season after season—whichever model you select is sure to provide years of dependable service.


DESIGNED TO SAVE ENERGY



Ceramic fiber combustion chamber for lightweight, compact design.



Copper heat exchanger and Flo-Thru™ baffles provide efficient heat transfer and lower the amount of energy needed to heat your pool.



Reliable, self cleaning hot surface ignition systems provide trouble free operation on LD and LJ models season after season.

THREE MODELS TO CHOOSE FROM:

The Lite2 LJ



Liquid crystal digital display features options that include pump control, dual temperature control,

built-in freeze protection and advanced heater diagnostics.

The Lite2 LD



Is easy to operate, providing separate controls for pool and spa.

The Lite2 LG



Keeps it simple with an easy on/off switch and a single control for pool water temperature maintenance.

Efficiency You Can Depend On



Performance you can rely on... with Jandy Technology inside



Lite2 Heaters

Jandy's Expertise and design know-how are reflected in the technologically advanced Lite2 LJ heater. The LJ makes life around the pool more enjoyable with its programmable features.



LITE2 PERFORMANCE CHARTS

The Pool Sizing Guide below shows the maximum pool surface area our Lite2 models will heat based on the Temperature Difference* between the air temperature during the coldest month the pool is used and the desired pool temperature. Figures are based on average wind conditions and average pool depth.

POOL SIZING GUIDE

Model	125		175		250		325		400	
Temp Diff*	Maximum Area Heater (width x length)									
	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH
15°F	875	675	1250	925	1775	1325	2300	1725	2850	2125
20°F	675	500	925	700	1325	1000	1725	1300	2125	1600
25°F	525	400	750	550	1075	800	1400	1050	1700	1300
30°F	450	325	625	475	900	700	1250	875	1425	1075
35°F	400	300	550	400	775	575	1000	750	1225	900


The Spa Sizing Guide below details the time required for each model to raise spa temperature by 30°F.

SPA SIZING GUIDE

Model	125	175	250	325	400
Spa Size	Time Required to Raise Temp 30°				
200 Gallons	30 Minutes	25 Minutes	20 Minutes	15 Minutes	10 Minutes
400 Gallons	60 Minutes	45 Minutes	30 Minutes	25 Minutes	20 Minutes
600 Gallons	90 Minutes	65 Minutes	45 Minutes	35 Minutes	30 Minutes
800 Gallons	120 Minutes	90 Minutes	60 Minutes	50 Minutes	40 Minutes
1000 Gallons	150 Minutes	110 Minutes	75 Minutes	60 Minutes	50 Minutes

Specifications:

Model # LD/LG/LJ	BTU Input 1000's (kcal)	"W" Width Inches/cm	"V" Vent Diameter Inches/cm	"H" Outdoor Stack Inches/cm	"H" Indoor Stack Inches/cm	Weight Lbs/kg
125	125 (31.5)	15 (38.0)	5 (12.7)	9 1/8 (23)	16 1/4 (41.3)	148 (67)
175	175 (44.1)	18 (45.7)	6 (15.2)	9 3/4 (24)	24 1/8 (61.3)	175 (79)
250	250 (63.0)	22 1/2 (57.2)	7 (17.8)	10 (26)	25 1/4 (64.1)	182 (83)
325	325 (81.9)	26 3/4 (67.9)	8 (20.3)	10 5/8 (27)	26 1/2 (67.3)	214 (97)
400	400 (101.0)	31 3/4 (80.6)	9 (22.9)	13 1/4 (34)	27 1/2 (69.9)	228 (103)

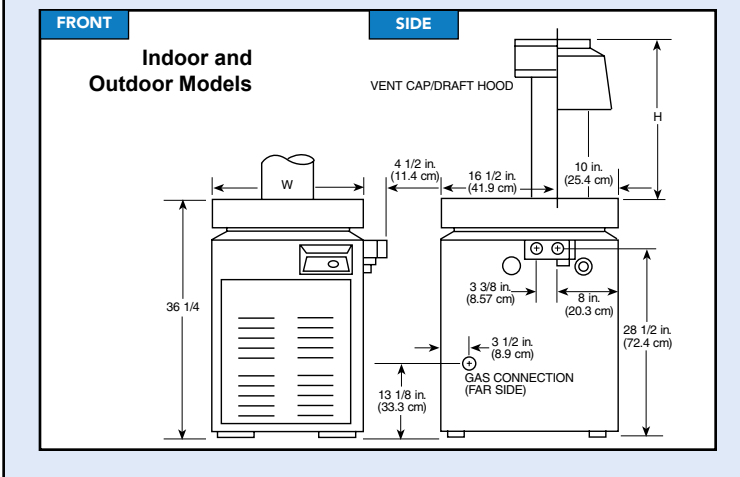

See your Jandy Sales Representative for more information!



ALL JANDY PRODUCTS WORK SEAMLESSLY TOGETHER

Jandy Control Systems manage our complete line of technologically advanced products.



Pumps • Filters • Heaters • Heat Pumps
Controls • Lights • Water Purification Systems • Valves
Water Features • Cleaners • Accessories

